


Typical Saturation Efficiency (45/45) 7 MM Flute Height

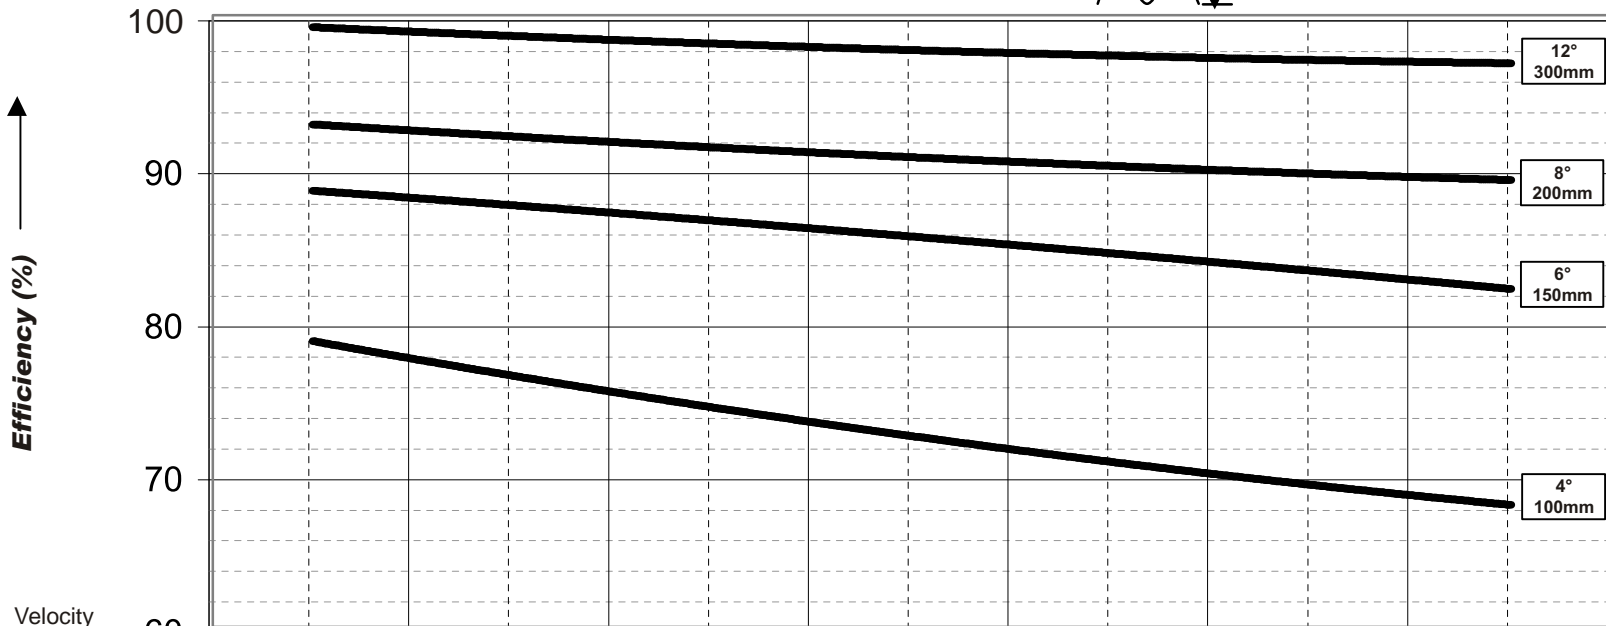

Velocity

60

FPM →

M/S →

Pad Thickness

	200	250	300	350	400	450	500
12" / 300 mm	99	99	98	98	97	97	97
8" / 200 mm	93	92	91	91	90	90	89
6" / 150 mm	89	87	86	86	85	83	82
4" / 100 mm	79	76	74	73	71	69	68



Typical Saturation Efficiency (5mm)

Desiccant Rotors International Pvt. Ltd.
 100-101, Udyog Vihar, Phase IV, Gurgaon 122015, Haryana (India)
 Phone: 91-124-4188888 Fax: 91-124-4188800
 Email: dri@pahwa.com Website: www.drirotors.com

